

KALKHOFF BERLEEN ADVANCE G10

- // Stylish aluminium frame with integrated battery
- // Handlebar stem combination with integrated front light
- // Simple to remove: battery with clip lock
- // The Kalkhoff app also displays E-bike information



cool grey matte

MOTOR: Groove Go, 36 V / 250 W
BATTERY: Groove Next Li-Ion 36V / 7AH (252Wh) / 7 Ah (252 Wh)

CHARGER: Groove Next, 2A

Recommended price
\$ 2.499

FRAME DESIGNS



GROOVE NEXT

SPECIFICATIONS

SHIFTING SYSTEM: Shimano Tiagra, 10-speed
SHIFTER: Shimano Tiagra 4700
CRANKSET: Prowheel, alloy
SPROCKET: SRAM PG-1050
GEAR RATIO: front: 48, rear: 11-28
DRIVETRAIN: Shimano Tiagra CN-4601
BRAKES: Shimano M396, hydraulic disc brake
BRAKE ROTORS: front: 160 mm, rear: 160 mm
FRONT-LIGHT: Herrmans H-Black MR8, LED

REAR-LIGHT: Busch + Müller Line Small, with Standlight
FRAME: Urban Integrated, aluminium
FORK: Urban Integrated, aluminium
HANDLEBAR: Kalkhoff One Piece, Urban
GRIPS: Ergon GA30
SADDLE: Selle Royal Rampage, Selle Royal Verve
SEATPOST: Concept EX
PEDALS: Urban, with anti slip protection and reflector
RIMS: Concept EX

HUBS: front: SP PL-8X sport dynamo hub, 12x100 mm thru axle
rear: Groove Go, rearhub motor
TYRES: Continental Contact Speed, 35-622
FENDER: aluminium, painted
FRONT CARRIER: Urban Rear-Low Rider
KICKSTAND: rear stand, adjustable
PERMISSIBLE TOTAL CAPACITY: 285 lb


ITEM NUMBERS

Freewheel

Item	Size
28" Diamond	S/41
28" Diamond	M/46
28" Diamond	L/51
28" Diamond	XL/56

GEOMETRIES

Diamond

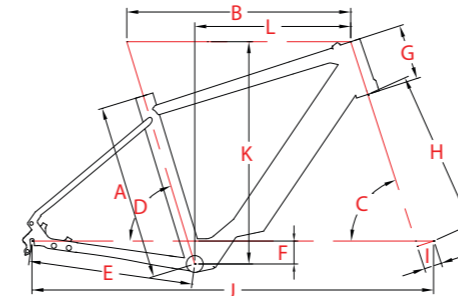

Diamond				
Wheel diameter	28"	28"	28"	28"
A Seat tube length (mm)	410	460	510	560
B Top tube length (mm)	576,9	586	598	609
C Steering angle (°)	72	72	72	72
D Seat angle (°)	73	73	73	73
E Chain stay length (mm)	430	430	430	430
F Bottom bracket drop (mm)	60	60	60	60
G Head tube length (mm)	135	145	160	170
H Fork installation height (mm)	418	418	418	418
I Forward fork curve (mm)	45	45	45	45
J Wheelbase (mm)	1041	1051	1063	1074
K Stack (mm)	572	582	596	605
L Reach (mm)	402	408	416	424
Standover/step-through height	480	480	480	480
Handlebar width (mm)	700	700	700	700
Stem length (mm)				
Crank arm length (mm)	170	170	170	170

The specifications and not the pictures are decisive. Technical changes of the components and errors excepted.