

KALKHOFF DURBAN COMPACT G8

- // The new urban product family for everyday riding
- // New E-Bike system - Groove Go
- // Compact mobility: Light rear motor and 252 Wh battery
- // Convenient aluminium front luggage carrier



midnightblue matte

MOTOR: Groove Go, 36 V / 250 W
DISPLAY: Control panel on battery

BATTERY: Groove Li-Ion 36 V / 7 Ah (252 Wh)
CHARGER: Groove Go, 2A

Recommended price
\$1,999

FRAME DESIGNS



GROOVE GO

SPECIFICATIONS

SHIFTING SYSTEM: Shimano Sora, 8-speed
SHIFTER: Shimano Altus M310
CRANKSET: Concept
SPROCKET: Shimano HG200
GEAR RATIO: front: 42, rear: 12-32
DRIVETRAIN: Shimano CN-HG53
BRAKES: Tektro T285, hydraulic disc brake
BRAKE ROTORS: front: 160 mm, rear: 160 mm
FRONT-LIGHT: AXA BlueLine30, LED

REAR-LIGHT: Büchel Beetle, LED, with stand light
FRAME: Compact RHM, aluminium
FORK: aluminium, rigid
STEM: Concept SL, adjustable
HANDLEBAR: Concept Tour
GRIPS: Herrmans Basic
SADDLE: Concept Trekking
SEATPOST: Concept
PEDALS: Comfort, with anti slip protection and reflector

RIMS: Rodi Web, with eyelets
HUBS: front: Concept, QR
rear: Groove Go, rearhub motor
TYRES: Schwalbe Big Ben, 55-406
FENDER: plastic
FRONT CARRIER: Urban front carrier
KICKSTAND: Ursus Queen, rear stand
PERMISSIBLE
TOTAL CAPACITY: 285 lb


ITEM NUMBERS

Freewheel

Item	Size
20" Compact	S/46

GEOMETRIES

Compact

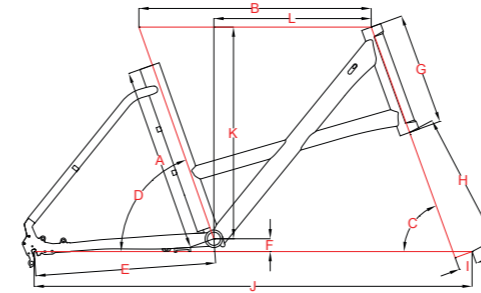

	Compact
Wheel diameter	20"
A Seat tube length (mm)	470
B Top tube length (mm)	580
C Steering angle (°)	70
D Seat angle (°)	70.5
E Chain stay length (mm)	450
F Bottom bracket drop (mm)	-32
G Head tube length (mm)	280
H Fork installation height (mm)	330
I Forward fork curve (mm)	45
J Wheelbase (mm)	1094
K Stack (mm)	528,6
L Reach (mm)	392,8
Standover/step-through height	535
Handlebar width (mm)	640
Stem length (mm)	90
Crank arm length (mm)	170

The specifications and not the pictures are decisive. Technical changes of the components and errors excepted.