

KALKHOFF ENDEAVOUR ADVANCE B10 SPEED

- // Bosch Performance CX drive system
- // Integrated Bosch Powertube battery with 500 watt hours
- // Adjustable handlebar stem with integrated cable
- // Up to 28 mph



magicblack matte



Firered glossy

MOTOR: Bosch Performance Line Speed 36V / 350W

BATTERY: Bosch PowerTube Li-Ion 36V / 13,4 Ah (500 Wh)

DISPLAY: Bosch Intuvia LCD, with control panel and walk assist

RANGE: up to 60 mi

CHARGER: Bosch, 4A

Recommended price
\$ 3.999



FRAME DESIGNS



SPECIFICATIONS

SHIFTING SYSTEM: Shimano SLX, 10-speed
SHIFTER: Shimano SLX M670
CRANKSET: Concept
SPROCKET: Shimano HG500
GEAR RATIO: front: 18, rear: 11-34
DRIVETRAIN: Shimano CN-HG54
BRAKES: Shimano M396, hydraulic disc brake
BRAKE ROTORS: front: 180 mm, rear: 180 mm
FRONT-LIGHT: Herrmans H-Black MR8, LED
REAR-LIGHT: AXA BlueLine, LED

FRAME: Integrale 0.5, aluminium
FORK: SR Suntour NEX E25, lockout, 15mm QR
STEM: Concept EX, adjustable
HANDLEBAR: Concept EX Ergo Riser, Concept EX Riser
GRIPS: Ergon GP10, Ergon GX1
SADDLE: Selle Royal Lookin
SEATPOST: Concept EX
PEDALS: Urban, with anti slip protection and reflector
RIMS: Rodi Blackrock, with eyelets

HUBS: front: Shimano Deore M6010, 15x100 mm thru axle
 rear: Shimano Deore M6010, 12x142 mm thru axle
TYRES: Schwalbe Marathon GT Tour, 47-622
FENDER: plastic, with edge protector
FRONT CARRIER: Racktime system
KICKSTAND: rear stand, adjustable
PERMISSIBLE TOTAL CAPACITY: 285 lb


ITEM NUMBERS

Freewheel


Item	Size
28" Diamond	M/48
28" Diamond	L/53
28" Diamond	XL/58
28" Trapeze	S/43
28" Trapeze	M/48
28" Trapeze	L/53

GEOMETRIES

Diamond

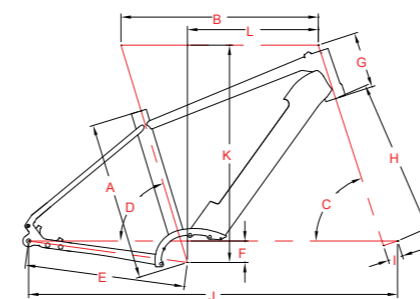

Trapeze

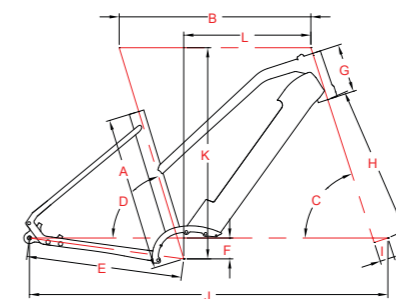

	Diamond		Trapeze			
	28"	28"	28"	28"	28"	28"
Wheel diameter	28"	28"	28"	28"	28"	28"
A Seat tube length (mm)	480	530	580	430	480	530
B Top tube length (mm)	597,1	606	614,9	588,2	597,1	606
C Steering angle (°)	72	72	72	72	72	72
D Seat angle (°)	73	73	73	73	73	73
E Chain stay length (mm)	485	485	485	485	485	485
F Bottom bracket drop (mm)	65	65	65	65	65	65
G Head tube length (mm)	170	180	190	160	170	180
H Fork installation height (mm)	468	468	468	468	468	468
I Forward fork curve (mm)	45	45	45	45	45	45
J Wheelbase (mm)	1116,6	1125,7	1125,7	1107,5	1116,6	1125,7
K Stack (mm)	657,9	667,4	676,9	648,4	657,9	667,4
L Reach (mm)	396	402	408	390	396	402
Standover/step-through height	840	866	890	800	804	808
Handlebar width (mm)	690	690	690	690	690	690
Stem length (mm)	80	100	100	80	80	100
Crank arm length (mm)	170	170	170	170	170	170

The specifications and not the pictures are decisive. Technical changes of the components and errors excepted.