

KALKHOFF IMAGE ADVANCE B8

- // New City E-Bike family: Image
- // Bosch Performance drive system
- // Integrated Bosch Powertube battery with 500 watt hours
- // Adjustable handlebar stem with integrated cable



heritageblue matte



diamondblack matte



whitesmoke glossy

MOTOR: Bosch Performance, 36 V / 250 W

DISPLAY: Bosch Intuvia LCD, with control panel and walk assist

BATTERY: Bosch PowerTube Li-Ion 36V / 13,4 Ah (500 Wh)

RANGE: up to 90 mi

CHARGER: Bosch, 4A

Recommended price

\$ 3.699



FRAME DESIGNS



SPECIFICATIONS

SHIFTING SYSTEM: Shimano Nexus, 8-speed
 SHIFTER: Shimano Nexus
 CRANKSET: Concept
 SPROCKET: Gates CDX Carbondrive
 GEAR RATIO: front: 46, rear: 22
 DRIVETRAIN: Gates Carbondrive CDX
 BRAKES: Shimano T445, hydraulic disc brake
 BRAKE ROTORS: front: 180 mm, rear: 160 mm
 FRONT-LIGHT: Herrmans H-Black MR8, LED

REAR-LIGHT: AXA Blueline, LED
 FRAME: Integrale 0.5 Belt, aluminium
 FORK: SR Suntour NEX E25, lockout
 STEM: Concept EX, adjustable
 HANDLEBAR: Concept EX City Riser, Concept EX Ergo Riser
 GRIPS: Ergon GC10
 SADDLE: Selle Royal Lookin
 SEATPOST: Patent MCU, suspension
 PEDALS: Urban, with anti slip protection and reflector

RIMS: Rodi Blackrock, with eyelets
 HUBS: front: Shimano Alivio M4050, QR
 rear: Shimano Nexus, 8 speed
 TYRES: Schwalbe Marathon, 47-622
 FENDER: plastic, with edge protector
 FRONT CARRIER: Racktime system, with integrated rear light
 KICKSTAND: rear stand, adjustable
 PERMISSIBLE
 TOTAL CAPACITY: 285 lbs

ITEM NUMBERS


Freewheel

Item Size


28" Diamond	M/48
28" Diamond	L/53
28" Diamond	XL/58
28" Wave	S/43
28" Wave	M/48
28" Wave	L/53

GEOMETRIES

Diamond

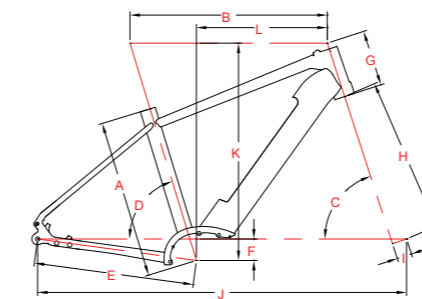

Wave

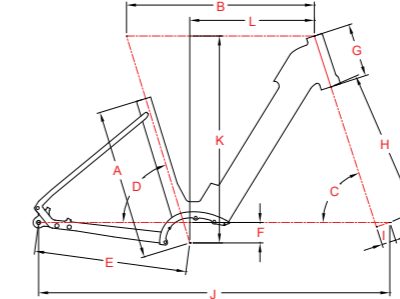

	Diamond			Wave		
Wheel diameter	28"	28"	28"	28"	28"	28"
A Seat tube length (mm)	480	530	580	430	480	530
B Top tube length (mm)	597,1	606	614,9	588,2	597,1	606
C Steering angle (°)	72	72	72	72	72	72
D Seat angle (°)	73	73	73	73	73	73
E Chain stay length (mm)	485	485	485	485	485	485
F Bottom bracket drop (mm)	65	65	65	65	65	65
G Head tube length (mm)	170	180	190	160	170	180
H Fork installation height (mm)	468	468	468	468	468	468
I Forward fork curve (mm)	45	45	45	45	45	45
J Wheelbase (mm)	1116,6	1125,7	1125,7	1107,5	1116,6	1125,7
K Stack (mm)	657,9	667,4	676,9	648,4	657,9	667,4
L Reach (mm)	396	402	408	390	396	402
Standover/step-through height	840	866	890	629	626	625
Handlebar width (mm)	690	690	690	690	690	690
Stem length (mm)	80	80	100	80	80	100
Crank arm length (mm)	170	170	170	170	170	170

The specifications and not the pictures are decisive. Technical changes of the components and errors excepted.



KALKHOFF
MY BIKE